

Scheduling Sensors by Tiling Lattices*

Andreas Klappenecker, Hyunyoung Lee, and Jennifer L. Welch

Abstract

Suppose that wirelessly communicating sensors are placed in a regular fashion on the points of a lattice. Common communication protocols allow the sensors to broadcast messages at arbitrary times, which can lead to problems should two sensors broadcast at the same time. It is shown that one can exploit a tiling of the lattice to derive a deterministic periodic schedule for the broadcast communication of sensors that is guaranteed to be collision-free. The proposed schedule is shown to be optimal in the number of time slots.

Keywords: distributed computing, scheduling sensors, lattice tiling, wireless communication.

1 Introduction

Sensors are sometimes distributed in a regular fashion to monitor an area. We assume that the sensors use wireless communication. Most wireless communication protocols allow the sensors to send at arbitrary times. However, this can cause the following *collision problems*: If two distinct sensors A and B send at the same time and B is within the interference range of A , then frequently hardware limitations prevent B from receiving the message of A correctly. In addition, if two distinct sensors A and B send at the same time and a sensor C is within interference range of both A and B , then C will not be able to correctly receive either message. In these cases, the sensors A and B need to resend their messages, which is evidently a waste of energy.

Let us assume that the sensors have access to the current time, represented by an integer t . One can assign each sensor node an integer k and set up a periodic schedule such that a node with integer k is allowed to broadcast messages at time t if and only if $t \equiv k \pmod{m}$. The goal of this paper is to give a convenient combinatorial formulation using lattice tilings that allows one to assign optimal schedules with minimal number of time slots m such that no two sensors that are scheduled to broadcast simultaneously have intersecting interference ranges; we call such schedules *collision-free*.

Related Work. Since most communication protocols for wireless sensor networks are probabilistic in nature, there exist few prior works that are directly related to our approach. However, there exist a few notable exceptions that we want to discuss here.

*The research by A.K. was supported by NSF CAREER award CCF 0347310 and NSF grant CCF 0622201. The research by H.L. was supported in part by NSF grant CNS-0614929. The research by J.W. was supported in part by NSF grant 0500265 and Texas Higher Education Coordinating Board grant ARP-00512-0007-2006.

Suppose for the moment that we are given a finite set of k sensors that share the same frequency band for communication. The simplest way to ensure that the communication will be collision-free, is to use a time division multiple access (TDMA) scheme. Here each of the k sensors is assigned a different time slot and scheduling is done in a round robin fashion. Because of its simplicity, this scheme is used in many systems, see e.g. [8, Chapter 3.4]. The obvious disadvantage of TDMA is that it does not scale: If the number k of sensors is large, then the sensors cannot communicate frequently enough.

The basic TDMA scheme does not take advantage of the fact that each sensor typically affects only small number of neighboring sensors by its radio communication. This prompts the question whether one can modify the TDMA scheme and find a schedule with m time slots that is collision-free. To answer this question, consider a directed graph that has a node for each sensor and an edge from vertex v to vertex u if and only if u is affected by the radio communication of v . A valid schedule with m time slots corresponds to a distance-2 coloring with m colors, that is, all vertices of distance ≤ 2 must be assigned a different color (= time slot) to avoid collision problems. Therefore, the number of time slots m of an optimal collision-free schedule coincides with the chromatic number of a distance-2 coloring. The distance-2 coloring problem is also known as the broadcast scheduling problem in the networking community.

McCormick has shown that the decision problem whether a given graph has a distance-2 coloring with m colors is NP-complete [6]. Lloyd and Ramanathan showed that the broadcast schedule problem even remains NP-complete when restricted to planar graphs and $m = 7$ time slots [5].

Due to these intractability results, much of the subsequent research focused on heuristics for finding optimal schedules; for instance, Wang and Ansari used simulated annealing [12], and Shi and Wang used neural networks [9] to find optimal schedules. Another popular direction of research are approximation algorithms for broadcast scheduling algorithms, see e.g. [7].

Contributions. The main contributions of this paper can be briefly summarized as follows (the terminology is explained in the subsequent sections):

- 1) We develop a method that allows one to derive an optimal collision-free schedule from the tiling of a lattice.
- 2) Our scheme scales to an arbitrary number of sensors; in fact, we formulate our schedules for an infinite number of sensors. Schedules for a finite number of sensors are obtained by restriction, and these schedules remain optimal under very mild conditions (given in the conclusions).
- 3) Our assumption on the set of prototiles ensures that an optimal schedule is obtained regardless of the chosen tiling. In Section 4, we show that if our assumption on the set of prototiles is removed, then in general one will not obtain an optimal schedule.

We formulate our results for arbitrary lattices in arbitrary dimensions, since the proofs are not more complicated than in the familiar case of the two-dimensional square lattice. For the square lattice, there are polynomial-time algorithms available to check whether a given prototile can tile the lattice; thus, despite the fact that finding optimal schedules is NP-hard in general, one can use our method to easily construct optimal schedules in the case

of a single prototile. This method of creating simple instances of an NP-hard problem might be of independent interest.

2 Lattice Tilings and Optimal Schedules

A Euclidean lattice L is a discrete subgroup of $\mathbf{R}^d$ that spans the Euclidean space $\mathbf{R}^d$ as a real vector space. In other words, there exist d vectors $\{v_1, \dots, v_d\}$ in L that are linearly independent over the real numbers such that

$$L = \left\{ \sum_{k=1}^d a_k v_k \mid a_k \in \mathbf{Z} \text{ for } 1 \leq k \leq d \right\},$$

and for each vector v in L there exists an open set containing v but no other element of L . In particular, the group L is isomorphic to the additive abelian group $\mathbf{Z}^d$. Two examples of lattices in two dimensions are illustrated in Figure 1.




Figure 1: The figure on the left shows part of the square lattice $L_S = \mathbf{Z}^2$ that is generated by the vectors $v_1 = (1, 0)$ and $v_2 = (0, 1)$. The figure on the right shows the hexagonal lattice L_H that is generated by the vectors $u_1 = (1, 0)$ and $u_2 = (\frac{1}{2}, \frac{1}{2}\sqrt{3})$.

Our goal is to find a deterministic collision-free periodic schedule for sensors located at the points of a lattice L that is optimal in the number of time slots, *i.e.*, no periodic schedule with a shorter period can be found that is collision-free.

We call a finite subset N of L a *prototile* or a *neighborhood* of the point 0 if and only if it contains 0 itself. The particular nature of N will be determined for instance by the type of antenna and by the signal strength used by the sensor. The elements in N are the sensors affected by wireless communication of the sensor located at the point 0 (that is, only the elements in N are within interference range of the sensor located at the point 0). We will first assume a homogeneous situation, namely the neighborhood affected by communication of the sensor located at a point t in L is of the form $t + N = \{t + n \mid n \in N\}$, where the addition denotes the usual addition of vectors in $\mathbf{R}^d$. The set $t + N$ contains t , since 0 is contained in N . Some examples of neighborhoods N are given in Figure 2.

Our schedule will be a deterministic periodic schedule, that is, each sensor is assigned a certain time slot and it is only allowed to send during that time slot. Since our schedule is required to be free of collision problems, it follows that the sensors located at distinct points s and t in L cannot broadcast at the same time unless

$$(s + N) \cap (t + N) = \emptyset.$$

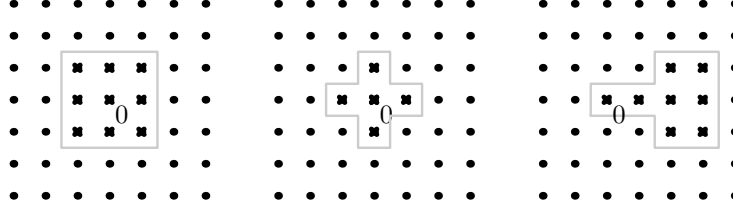


Figure 2: The three figures illustrate some possible shapes of the neighborhood N of 0. The elements in N are marked by small crosses. The left figure is a ball of radius 1 in the Chebycheff (or ℓ_∞) metric. The figure in the middle is a ball of radius 1 in the Euclidean (or ℓ_2) metric. The figure on the right provides an example of a neighborhood where the sensor at 0 uses a directional antenna.

Let T denote a subset of L . We say that T provides a *tiling* of L with neighborhoods (or tiles) of the form N if and only if the following two conditions hold:

T1. $\bigcup_{t \in T} (t + N) = T + N = L$,

T2. $(s + N) \cap (t + N) = \emptyset$ for all distinct s, t in T .

The set T contains all the vectors that translate the prototile N . Condition **T1** says that the whole lattice L is covered by the translates $t + N$ of the prototile N , when t ranges over the elements of T . Condition **T2** simply says that the translates of the tile N do not overlap.

The tilings provide us with an elegant means to construct an optimal deterministic schedule.

Theorem 1. *Let T be a tiling of a Euclidean lattice L in $\mathbf{R}^d$ with neighborhoods of the form N . Then there exists a deterministic periodic schedule that avoids collision problems using $m = |N|$ time slots. The schedule is optimal in the sense that one cannot achieve this property with fewer than m time slots.*

Proof. Suppose that $N = \{n_1, \dots, n_m\}$ is the neighborhood of 0. For k in the range $1 \leq k \leq m$, we schedule the sensors located at the points $n_k + T$ at time $t \equiv k \pmod{m}$. We first notice that each sensor located at a point in L is scheduled at some point in time, since $N + T = L$ by property **T1** of a tiling.

Seeking a contradiction, we assume that the schedule is not collision-free. This means that at some time k in the range $1 \leq k \leq m$ there exist sensors located at the positions $n_k + s$ and $n_k + t$ with distinct s and t in T such that $(n_k + s + N) \cap (n_k + t + N) \neq \emptyset$. However, this would imply that $(s + N) \cap (t + N) \neq \emptyset$ for distinct s and t in T , contradicting property **T2** of a tiling. It follows that our schedule is collision-free.

It remains to prove the optimality of the schedule. Seeking a contradiction, we assume that there exists a schedule with $m_0 < m$ time slots that is collision-free. This means that for some time slot k in the range $1 \leq k \leq m_0$ two elements n' and n'' of N must be scheduled. However, this would imply that the element $n' + n''$ is contained in both sets $(n' + N)$ and $(n'' + N)$, contradicting the assumption that the schedule with m_0 time slots is collision-free. $\square$

We illustrate some aspects of the proof of the previous theorem in Figure 3.

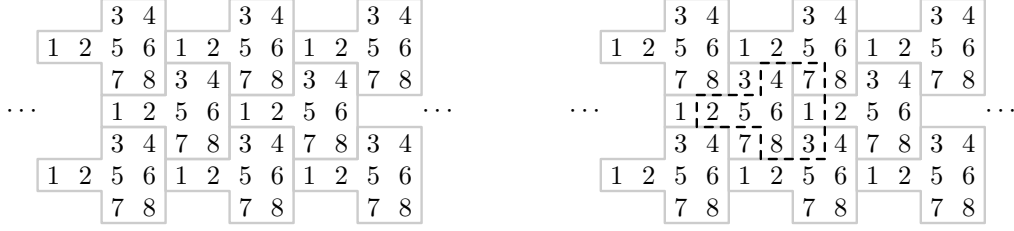


Figure 3: The figure on the left illustrates the previous theorem using a tiling with the neighborhood N given by the rightmost example of Figure 2. Each of the eight elements of N is assigned a time slot from 1 to 8, the translated versions $t + N$ with t in T have the time slots at the corresponding translated positions. As a result, the broadcast during time slot 1 affects only the neighborhoods shown in the tiling depicted by the figure. The figure on the right shows one dashed neighborhood of a sensor broadcasting during time slot 2. Considering the neighborhoods of all sensors broadcasting during time slot 2 one obtains once again a tiling, namely the tiling of L_S obtained by right shifting the (solid gray) neighborhoods of the sensors broadcasting during time step 1.

3 Existence of Tilings

Our concept of tiling a lattice with translates of a prototile N turned out to be convenient for our purposes. In this section, we relate the tilings of a lattice to tilings of the Euclidean space $\mathbf{R}^d$, so that we can benefit from the large number of results that are available in the literature.

Any tiling of a lattice L can be converted into a tiling of $\mathbf{R}^d$ as follows. Let K denote the union of the closed Voronoi regions about the points in N . Then the translates $t + K$ with t in T yield a tiling of $\mathbf{R}^d$. Conversely, any tiling of $\mathbf{R}^d$ with translates of a tile consisting of the union of Voronoi regions of points in L evidently yields a tiling of the lattice L in our sense. Figure 4 shows some two-dimensional examples of Voronoi regions.



Figure 4: (a) The figure on the left shows that the Voronoi region about a point in the square lattice L_S is given by a square of unit length; a tile K in the plane obtained by a union of unit squares about points in L_S is called a quasi-polyomino. (b) A Voronoi region about a point in the hexagonal lattice L_H is a hexagon; a tile K in the plane obtained from a union of these Voronoi-hexagons about points in L_H is called a quasi-polyhex.

The union of Voronoi regions about points in a lattice are also known as quasi-polyforms. A quasi-polyform that is homeomorphic to the unit ball in $\mathbf{R}^d$ is known as a polyform. The books by Grünbaum and Shepherd [4] and by Stein and Szabó [10] contain numerous examples of tilings obtained by translating quasi-polyforms (and especially polyforms). The polyforms in the square grid $L_S = \mathbf{Z}^2$ are called polyominoes, the most well-known type of polyforms; see Golomb's book [3]. By abuse of language, we will also refer to a prototile N in L_S as a polyomino if the union of the Voronoi regions of N form a polyomino.

A prototile N in a lattice L that admits a tiling is called *exact*. It is natural to ask the following question:

Q1. When is a given prototile N exact, *i.e.*, when does there exist a subset T of L such that the conditions **T1** and **T2** are satisfied?

Beauquier and Nivat gave a simple criterion that allows one to answer **Q1** for polyominoes in the square lattice L_S . Roughly speaking, their criterion says that if N can be surrounded by translates of itself such that there are no gaps or holes, then N is exact; see [1] for details. In particular, it immediately follows that each prototile shown in Figure 2 is exact.

Algorithmic criteria for deciding the question **Q1** are particularly interesting. For polyominoes in the square lattice L_S , one can decide this question in time polynomial in the length of the boundary of the polyomino (described by a word over the alphabet $\{u, d, l, r\}$, which is short for up, down, left, and right), as Wijshoff and van Leeuwen have shown [13]. The characterization of exactness of a polyomino by Beauquier and Nivat [1] mentioned above leads to an $O(n^4)$ algorithm, where n is the length of the word describing the boundary. Recently, Gambini and Vuillon [2] derived an improved $O(n^2)$ algorithm for this problem.

Less is known for arbitrary (not necessarily connected) prototiles in a general lattice. Szegedy [11] derived an algorithm to decide whether a prototile N in a lattice L is exact assuming that the cardinality of N is a prime or is equal to 4.

4 Generalization to Several Prototiles

We have seen that the conditions for tiling a lattice with a single prototile are somewhat restrictive. For example, we might want to allow different rotated versions of the tile if the radiation pattern of the antenna used by a sensor is asymmetrical. We might want to consider different tiles corresponding to various different signal strength settings. Furthermore, we might want to allow sensors with various different styles of antenna.

We can accommodate all these different situations by allowing translates of several prototiles instead of just a single one. In this section, we show that one can still obtain an optimal periodic schedule which guarantees that the schedule is collision-free, as long as sensors of the same type and setting are deployed within each tile and a constraint on the tiles is satisfied.

Let L be a lattice in $\mathbf{R}^d$. Let $N_1, \dots, N_n$ be prototiles in the lattice L , that is, N_k is a subset of L that contains 0 for $1 \leq k \leq n$. Let $T_1, \dots, T_n$ be pairwise disjoint nonempty subsets of L . We say that $T_1, \dots, T_n$ provide a tiling of L with prototiles $N_1, \dots, N_n$ if and only if the following two conditions are satisfied:

$$\mathbf{GT1.} \quad \bigcup_{k=1}^n \bigcup_{t_k \in T_k} (t_k + N_k) = \bigcup_{k=1}^n (T_k + N_k) = L.$$

GT2. For all $k, \ell \in \{1, \dots, n\}$, we have $(s_k + N_k) \cap (t_\ell + N_\ell) = \emptyset$ for all s_k in T_k and t_ℓ in T_ℓ such that $s_k \neq t_\ell$.

Condition **GT1** ensures that the lattice L is covered by translates of the prototiles $N_1, \dots, N_n$. Condition **GT2** ensures that two distinct tiles will not overlap. The set T_k contains all vectors that are used to translate the tile N_k , that is, the set $\{t_k + N_k \mid t_k \in T_k\}$ contains all shifted versions of N_k that occur in the tiling of L . Since

the sets $T_1, \dots, T_n$ are pairwise disjoint, it is clear that $(s_k + N_k) \cap (t_\ell + N_\ell) = \emptyset$ whenever $k \neq \ell$. Condition **GT2** requires further that the translates of the prototile N_k with elements in T_k do not overlap.

We will call a tiling of L *respectable* if and only if the prototile N_1 contains all other prototiles N_k , that is, $N_1 \supseteq N_k$ for $2 \leq k \leq n$. If this is the case, then we call N_1 the *respectable prototile*.

Suppose that we are given a tiling $T_1, \dots, T_n$ of L respectively with neighborhoods of the form $N_1, \dots, N_n$. We will assume that the sensors are deployed in the following fashion:

D1. A sensor at location s_k in the neighborhood $t_k + N_k$ of an element t_k in T_k affects precisely the neighbors $s_k + N_k$ by interference, where k is in the range $1 \leq k \leq n$.

Loosely speaking, condition **D1** says that all elements in the neighborhood $t_k + N_k$ have neighborhood type N_k .

Theorem 2. *Let $T_1, \dots, T_n$ be a respectable tiling of a Euclidean lattice L with neighborhoods of the type $N_1, \dots, N_n$. Suppose that the sensors are deployed according to the scheme **D1**. Then there exists a deterministic periodic schedule that avoids collision problems using $m = |N_1|$ time slots. The schedule is optimal in the sense that one cannot achieve this property with fewer than m time slots.*

Proof. The periodic schedule is specified as follows. Let $N = \bigcup_{k=1}^n N_k = \{n_1, \dots, n_m\}$. For all ℓ in the range $1 \leq \ell \leq n$, we schedule the elements $n_k + T_\ell$ at time $t \equiv k \pmod{m}$ if and only if n_k is contained in the neighborhood N_ℓ .

Notice that all elements in L will be scheduled at some point in time by property **GT1**. Furthermore, condition **GT2** ensures that an element in L is not scheduled more than once within m consecutive time steps.

We claim that this schedule is collision-free. Seeking a contradiction, we assume that two distinct elements in L are scheduled at the same time, but yield a collision problem. In other words, there must exist integers k and ℓ in the range $1 \leq k, \ell \leq n$, an element $n \in N$ such that n is contained in both N_k and N_ℓ , and elements $s_k \in T_k$ and $t_\ell \in T_\ell$ with $s_k \neq t_\ell$ such that $(n + s_k + N_k) \cap (n + t_\ell + N_\ell) \neq \emptyset$. This implies that $(s_k + N_k) \cap (t_\ell + N_\ell) \neq \emptyset$ for $s_k \neq t_\ell$, contradicting property **GT2**. Therefore, our schedule is collision-free.

Without loss of generality, we may assume that the point 0 in L has a respectable neighborhood N_1 (otherwise, simply shift the tiling such that this condition is satisfied). Seeking a contradiction, we assume that there exists a deterministic periodic schedule with $m_0 < m$ time slots that is collision-free. It follows that there must exist two distinct elements n' and n'' in N_1 that are scheduled at the same time. However, this would imply that the element $n' + n''$ is contained in both $n' + N_1$ and $n'' + N_1$; thus, $(n' + N_1) \cap (n'' + N_1) \neq \emptyset$, contradicting the fact that the schedule with m_0 time slots is collision-free. $\square$

The previous theorem is a natural generalization of Theorem 1. A salient feature of Theorems 1 and 2 is that the optimal schedule is independent of the nature of the tiling of L .

Notice that one can obtain a collision-free periodic schedule even when there does not exist a respectable prototile. In fact, the respectable prototile was only used in the last part of the proof of Theorem 2 to establish the optimality of the schedule. Therefore, one might wonder what will happen in the non-respectable case.

Let us agree on some ground rules. We would like to maintain the fact that for each translated version of a prototile the schedule is the same, as this simplifies configuring the sensor network. However, in the non-respectable case we might have different prototiles of the same size, so we allow that the schedules in the different prototiles can be independently chosen, as long as this does not lead to collision problems. Figure 5 shows that the number of time steps in an optimal schedule depends on the chosen tiling when the tiling is non-respectable.

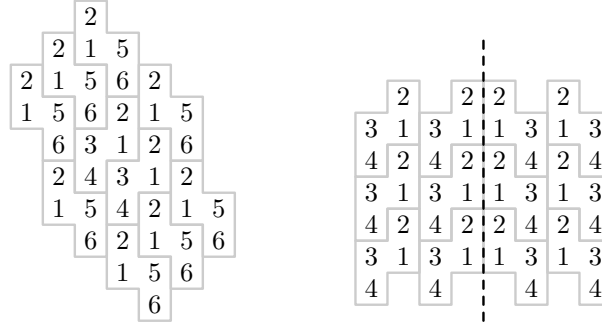


Figure 5: The figure on the left shows a schedule for a non-respectable tiling with two tetrominos (*i.e.*, prototiles with 4 elements). The tiling contains two Z-shaped tetrominos that are surrounded by S-shaped tetrominos (rotating the figure clockwise by 90° might help identifying the S and Z shapes). The schedule was determined with the algorithm given in the proof of Theorem 2. It is not difficult (though tedious) to show that this schedule with $m = 6$ time steps is optimal. However, if the lattice is tiled in the symmetric fashion shown in the right figure, then the optimal schedule has $m = 4$ time steps. Therefore, in the non-respectable case the number of time steps of an optimal schedule depends on the chosen tiling.

5 Conclusions

We have introduced a deterministic periodic schedule for sensors using wireless communication that are placed on the points of a lattice. We have shown that the schedule is optimal assuming that there exists a respectable prototile. A natural question is whether the schedule remains optimal if one restricts the schedule from the lattice L to a finite subset D of L . This question has an affirmative answer if D contains a translate of the set $N_1 + N_1$, as the latter set consists of the respectable prototile N_1 and its neighbors, in which case our optimality proof carries over without change.

Another natural question is whether one can extend the method to the case of mobile sensors. This question has an affirmative answer. Indeed, one straightforward way is to use our schedule to assign time slots to the locations rather than to the sensors. Let us assume that the lattice points are spaced fine enough to ensure that only one sensor is within a Voronoi region of a lattice point. If the time slot k is assigned to a lattice point p , then a sensor s within the open Voronoi region about p can send at time t if and only if $t \equiv k \pmod{m}$ and the

interference range of s fits within the tile of p . Clearly, this yields a collision-free schedule for mobile sensors. However, it should be stressed that there are many other solutions possible, but a comparison of such methods is beyond the scope of this paper.

References

- [1] D. Beauquier and M. Nivat. On translating one polyomino to tile the plane. *Discrete Comput. Geom.*, 6(6):575–592, 1991.
- [2] I. Gambini and L. Vuillon. An algorithm for deciding if a polyomino tiles the plane. *Theor. Inform. Appl.*, 41(2):147–155, 2007.
- [3] S.W. Golomb. *Polyominoes*. Princeton University Press, Princeton, NJ, second edition, 1994.
- [4] B. Grünbaum and G.C. Shephard. *Tilings and Patterns*. W.H. Freeman and Company, 1987.
- [5] E.L. Lloyd and S. Ramanathan. On the complexity of distance-2 coloring. In *Fourth Intl. Conf. on Computing and Information*, pages 71–74, 1992.
- [6] S.T. McCormick. Optimal approximation of sparse Hessians and its equivalence to a graph coloring problem. Technical report SOL 81-22, Department of Operations Research, Stanford University, 1981.
- [7] S. Ramanathan and Errol L. Lloyd. Scheduling algorithms for multi-hop radio networks. *ACM SIGCOMM Computer Communication Review*, 22(4):211–222, 1992.
- [8] J. Schiller. *Mobile Communications*. Addison Wesley, 2nd edition, 2003.
- [9] H. Shi and L. Wang. Broadcast scheduling in wireless multihop networks using a neural-network-based hybrid algorithm. *Neural Netw.*, 18(5-6):765–771, 2005.
- [10] S.K. Stein and S. Szabó. *Algebra and Tiling – Homomorphism in the service of Geometry*. Number 25 in The Carus Mathematical Monographs. The Mathematical Association of America, 1994.
- [11] M. Szegedy. Algorithms to tile the infinite grid with finite clusters. In *39th Annual Symposium on Foundations of Computer Science (FOCS '98)*, pages 137–147, 1998.
- [12] G. Wang and N. Ansari. Optimal broadcast scheduling in packet radio networks using mean field annealing. *IEEE J. Selected Areas in Communications*, 15(2):250–260, 1997.
- [13] H.A.G. Wijshoff and J. van Leeuwen. Arbitrary versus periodic storage schemes and tessellations of the plane using one type of polyomino. *Inform. and Control*, 62(1):1–25, 1984.